



**FAN WITH OPEN BLADES
 MIDDLE-HIGH EFFICIENCY
 AND LOW NOISENESS
 MOD. “PAS”**

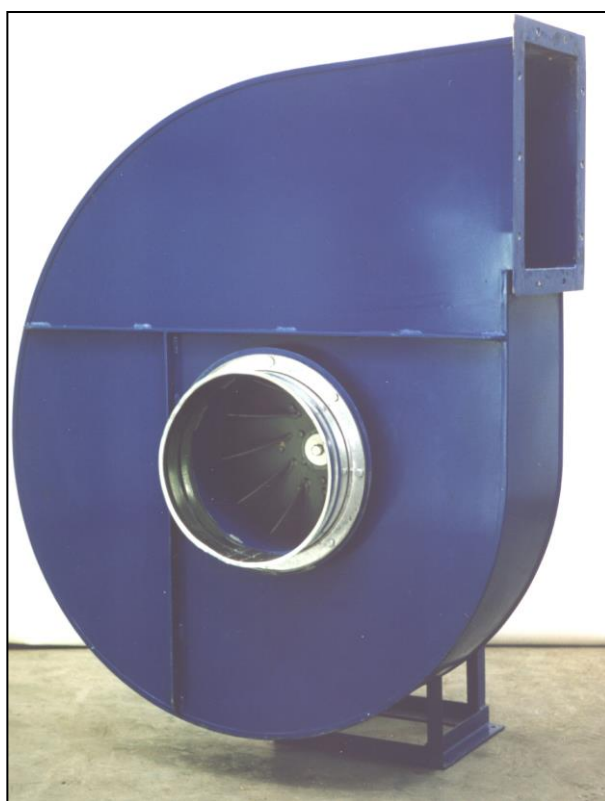

Employed for suction and transportation of very dusty air, sawdust and wood shavings, also for filamentary materials.

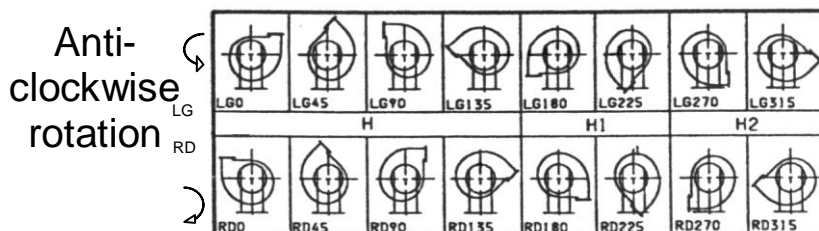

Loading allowance $\pm 5\%$

Noisiness allowance + 3 dB measured in a free field at the distance of 1,5 mt from the fan at the greatest output load, connected to the pipes in suction and in pressing according to the UNI regulations..

Mod. PAS	Kw	HP	Turns nr.	dB (A)	Ø suction mouth (mm)	Pressing mouth (mm)	Performances in suction						
<u>560</u> 4	3	4	1425	72	285	258 X 185	Mc/h	2700	3000	3400	3800	4300	
							Prev.(mm)	154	150	146	142	137	
<u>630</u> 4	4	5,5	1425	73	320	322 X 229	Mc/h	3000	3400	3800	4300	4800	5400
							Prev.(mm)	183	178	173	165	154	138
<u>710</u> 4	5,5	7,5	1440	75	360	361 X 256	Mc/h	3800	4300	4800	5400	6000	6700
							Prev.(mm)	210	205	200	192	185	175
<u>710</u> 4	7,5	10	1450	76	360	361 X 256	Mc/h	4300	4800	5400	6000	6700	7500
							Prev.(mm)	238	232	225	215	200	180
<u>800</u> 4	11	15	1460	78	405	404 X 288	Mc/h	6000	6700	7500	8400	9600	10800
							Prev.(mm)	290	285	275	260	245	225
<u>800</u> 4	15	20	1460	79	405	404 X 288	Mc/h	7500	8400	9600	10800	12000	13500
							Prev.(mm)	325	318	307	287	278	250
<u>900</u> 4	18,5	25	1470	81	505	453 X 322	Mc/h	9600	10800	12000	13500	15000	
							Prev.(mm)	322	315	306	290	275	
<u>900</u> 4	22	30	1470	82	505	453 X 322	Mc/h	13500	15000	17000	19000		
							Prev.(mm)	280	255	235	218		