


FLEX PIPE IN TRANSPARENT POLYURETHAN



Flex pipe in polyurethan with incorporated support spiral in phosphated steel. Suitable for AIR and ABRASIVE DUST suction.
Excellent abrasion resistance. Excellent flexibility.
Excellent resistance to the low temperatures, and good to the high ones.
Employment temperature: -40° +80° C.

FLEX PIPE IN P.V.C.

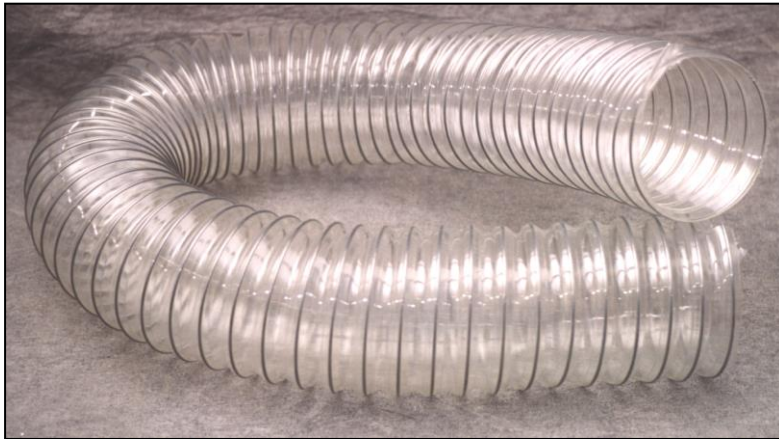

Flex pipe in plastic-coated PVC with reinforcement spiral in hard shock-resistant PVC. Suitable for AIR and SMOKES suction. Good resistance in suction. Employment temperature: -15° +60° C.